


PRODUCT DATA SHEET

RHINO ROOFING RP-61

- ✓ Satisfy BCA specifications and requirements for Reflective Foil Laminates.
- ✓ Complies with the specifications and requirements of AS/NZS 4200.1 for "Pliable Building Membranes" which is a manual recognised by the BCA Part 3.5 Roof and Cladding.
- ✓ Low Flammability Index in accordance with AS 1530.2 <5
- ✓ Satisfy BCA Part 3.7.1 Fire Hazard Properties.
- ✓ Satisfy Health & Safety Regulations
- ✓ Complies with AS/NZS 4040.4 Impact Resistance (Sandbag Test)

Product Information

Rhino Wrap Products are specifically manufactured to the highest industry standards.




ROOF INSULATION: Up to R1.0 (tiled) & R1.3 (Metal) may be added to insulation protection when Rhino Roofing RP-61 is installed within an airspace in roof structures.

Our specialised manufacturing process bonds together Aluminium Foil and high density Kraft Paper that is then laminated with a high strength reinforcing Polymer Mesh. Our Reinforcing Polymer Mesh is purposely-treated blue in colour to significantly reduce reflective glare problems when Rhino Wrap is installed. To achieve and ensure maximum protection is attained, Flame Retardant Adhesive is applied during the final process of manufacture in all Rhino Wrap Products.

ENERGY EFFICIENCY: Rhino Roofing RP-61 provides effective reductions in greenhouse gas emissions when used in an insulation agent in buildings. Preferred seasonal gains in required temperatures are assured.

LIGHT REFLECTIVITY: Gains of up to 40% can be obtained by using Rhino Roofing RP-61 as an exposed internal roof lining. Efficiencies in lighting loads are also evident. Conforms to AS/NZS 4859.1-2002.

PROTECTIVE ROOF/VAPOUR BARRIER: Added protection against stormwater, condensation and wind is achieved in roof structures when applied under roof tiles or metal roofs. Rhino Roofing RP-61 can also be a very effective vapour barrier when sealed with recommended tapes.

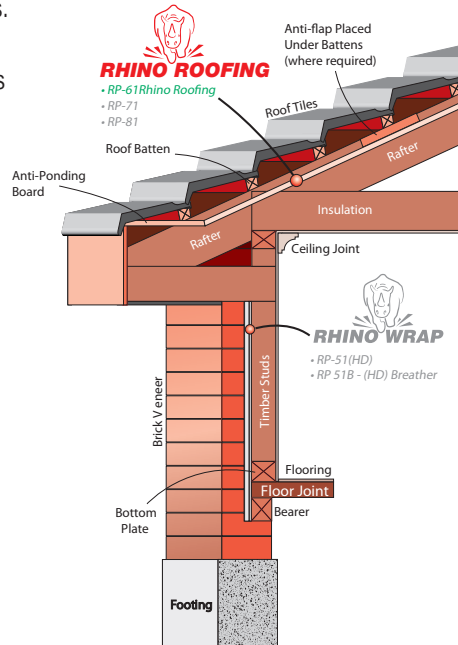

Rhino Wrap Usage

In all applications:

- External cladding should be installed A.S.A.P
- No contact is to be made with wet concrete or mortar
- Store in dry area, weather proofed only after installation
- Shrinkage of < 0.5%

In reflective foil laminate applications:

- Use only in accordance with AS/NZS 4200.2 for the "Installation Requirements for Pliable Building Membranes"
- Minimum of 20mm air space is recommended adjacent to reflective foil face to achieve Maximum insulation values
- 40mm sag between trusses is recommended when using Rhino Roofing RP-61

Recommended Applications and Properties

Tensile strength - Cladding	high
Durability - Cladding	high
Impact Resistant - Cladding	high
Residential & Commercial Roof Insulation	✓
Flame Retardant - Cladding	✓
Duty	Heavy
Vapour barrier	High
Emmittance	Reflective
Water barrier	High
Flammability Index <5	<5
Tensile Strength Machine Direction (kN/m)	min 12.5
Tensile Strength Lateral Direction (kN/m)	min 7.5
Edge Tear Resistance Machine Direction (N)	min 80
Edge Tear Resistance Lateral Direction (N)	min 80
Water vapour Transmission Rate (Ng/Ns)	max 2
Emmittance of Reflective Face	max 0.05

Availability

- Width 1500mmLength 30 metres.....Area 45m2

RHINO ROOFING RP-61

... the ultimate protection!



By: THOR Building Products

Phone: 1300 880 828

32 Lysaght Street, Acacia Ridge, QLD. 4110
PO Box 1140, Archerfield BC, QLD. 4108

Fax: (07) 3219 6833

Email: thorbuilding@ozemail.com.au

**Totally Australian
Owned and
Manufactured**